

CONTINUOUS DUTY

**4 poles**  
**50 Hz - 1500 rpm / 60 Hz - 1800 rpm**

AMBIENT TEMPERATURE		40°C	WINDING DATA										
TEMPERATURE RISE		H						Winding code					M0
INSULATION CLASS		H						Number of leads					12
POWER FACTOR		0,8						Winding pitch					2/3
FREQUENCY		Hz	50 Hz				60 Hz						
VOLTAGE	Connections	Star series Star parallel	V	380	400	415	440	380	416	440	460	480	
				190	200	208	220	190	208	220	230	240	
RATING POWER			kVA	450	450	450	430	460	480	520	540	550	
			kW	360	360	360	344	368	384	416	432	440	
EFFICIENCY [%] @ 0,8 p.f.			4/4	93,9	94,0	94,1	94,3	94,1	94,4	94,5	94,7	94,8	
			3/4	94,6	94,6	94,7	94,7	94,5	94,8	94,9	95,0	95,0	
			2/4	94,9	94,7	94,8	94,7	94,6	94,8	94,9	95,0	94,9	
EFFICIENCY [%] @ 1 p.f.			4/4	95,2	95,3	95,3	95,5	95,3	95,6	95,7	95,8	95,9	
			3/4	95,7	95,7	95,8	95,8	95,7	95,9	96,0	96,0	96,1	
			2/4	96,0	95,8	95,9	95,8	95,7	95,9	96,0	96,1	96,0	
SHORT CIRCUIT RATIO			SCR	0,36	0,4	0,43	0,51	0,29	0,34	0,35	0,37	0,39	
REACTANCES [%]													
Direct axis synchronous		X <sub>d</sub>	366	330	307	261	336	391	378	359	336		
Quadrature axis synchronous		X <sub>q</sub>	204	184	171	145	250	218	211	200	187		
Direct axis transient		X' <sub>d</sub>	33,1	29,9	27,8	23,6	40,6	35,4	34,3	32,6	30,5		
Direct axis subtransient		X'' <sub>d</sub>	14,3	12,9	12,0	10,2	17,5	15,3	14,8	14,0	13,1		
Quadrature axis subtransient		X'' <sub>q</sub>	16,6	15,0	13,9	11,8	20,4	17,8	17,2	16,3	15,3		
Negative sequence		X <sub>2</sub>	15,5	14,0	13,0	11,1	19,0	16,6	16,0	15,2	14,3		
Zero sequence		X <sub>0</sub>	3,5	3,2	3,0	2,5	4,3	3,8	3,7	3,5	3,3		
TIME CONSTANTS [s]													
Open circuit		T' <sub>do</sub>										2,07	
Transient		T' <sub>d</sub>										0,187	
Subtransient		T'' <sub>d</sub>										0,014	
Armature		T <sub>a</sub>										0,018	

**MECHANICAL CHARACTERISTICS**

D-end bearing/Lubrication	6319 C3 / With grease nipple
N-end bearing/Lubrication	6315 2Z C3 / Prelubricated
Overspeed [r.p.m.]	2250
Inertia (J) [kgm <sup>2</sup> ]	Refer to B34 construction 5,68
Weight [kg]	Refer to B34 construction 1200
Method of cooling	IC01
Cooling air required [m <sup>3</sup> /s] @ 50/60 Hz	0,83 / 1,00
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34
Direction of rotation (Standard)	CW

**OTHER DATA**

Phase resistance [Ω] @ 20 °C - Star series	0,007
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	≥ 300 % (3 I <sub>n</sub> ) with auxiliary winding
Voltage regulation accuracy	± 0,5 % I <sub>n</sub> steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% - At no load

**STANDARDS**


IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.

**Typical efficiency curves**
**50 Hz - 1500 rpm**


**Typical efficiency curves**

**50 Hz - 1500 rpm**


**380 V**

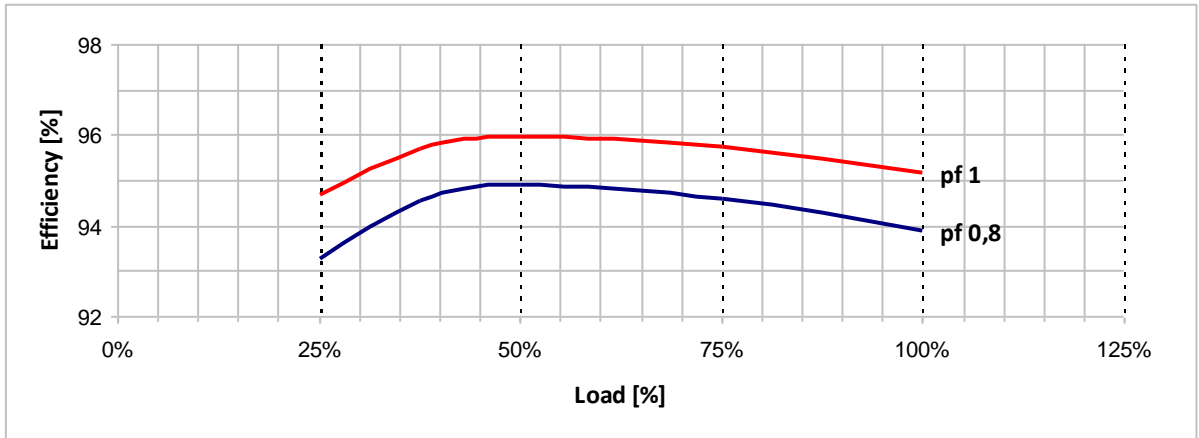


**400 V**

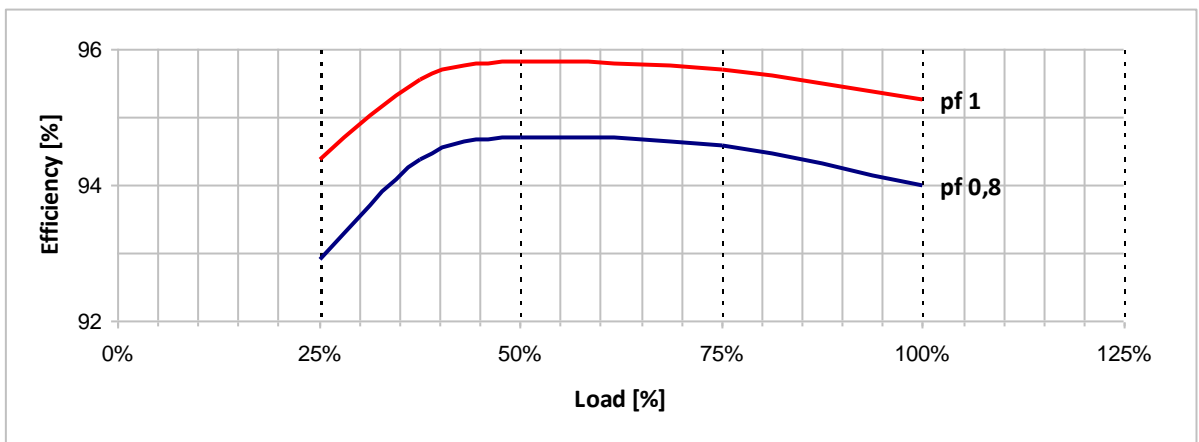

**415 V**

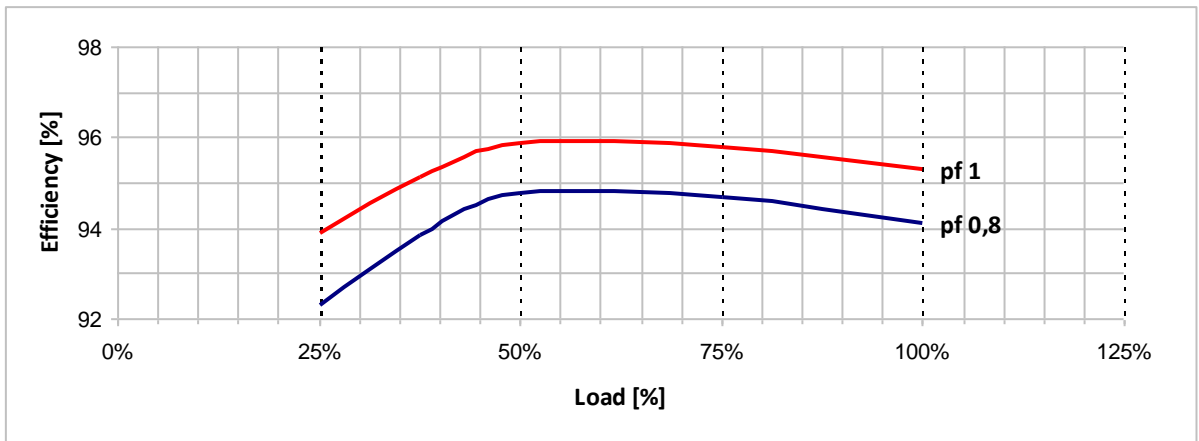


**440 V**

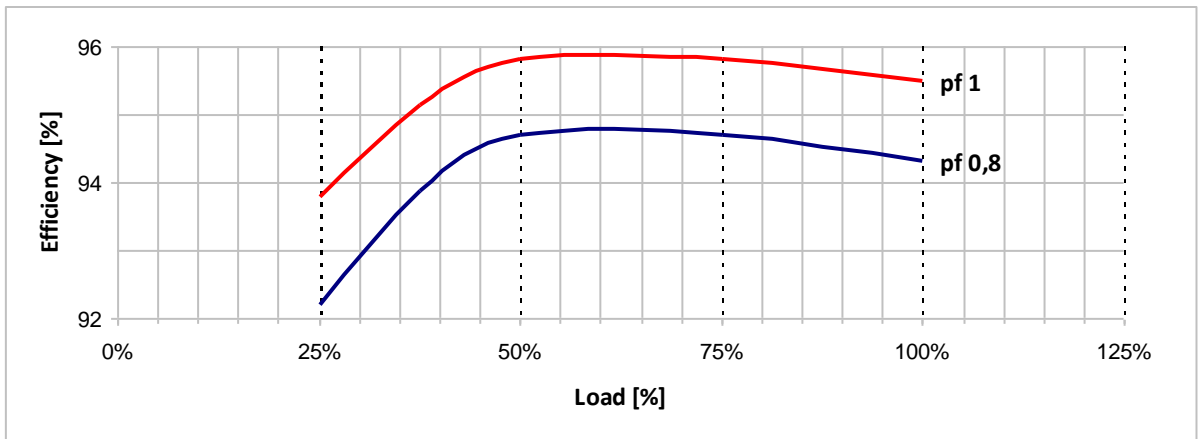


**Typical efficiency curves**

**60 Hz - 1800 rpm**


**380 V**

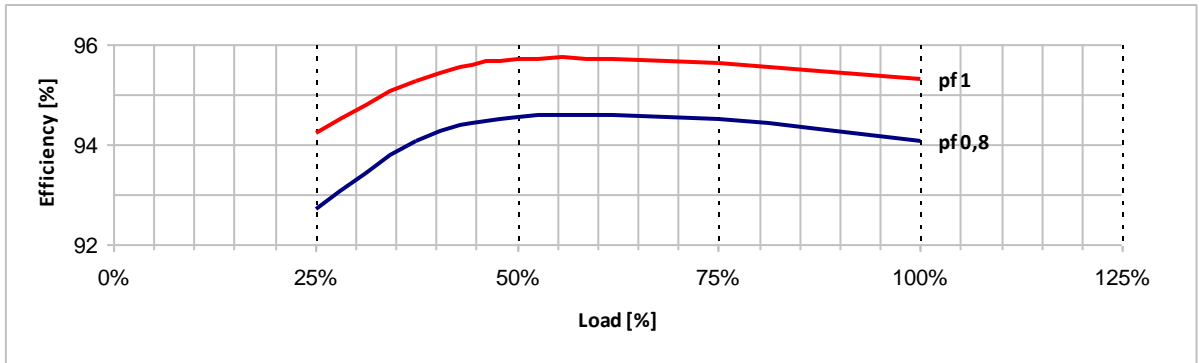


**416 V**

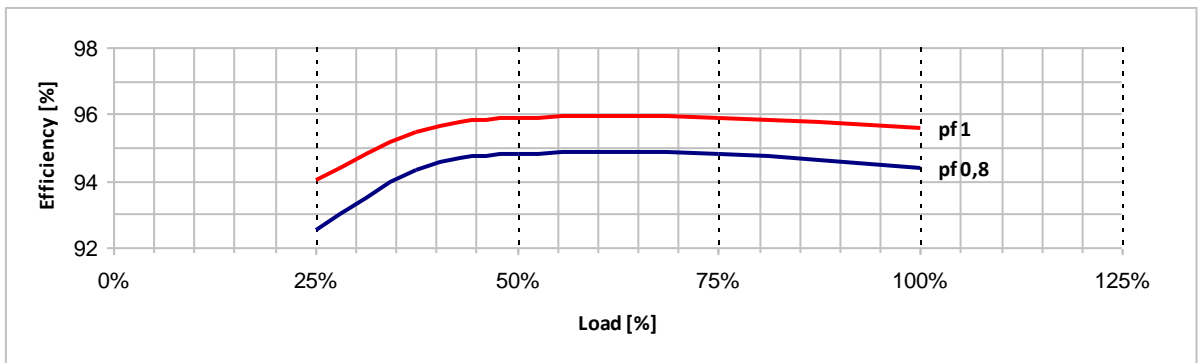


**440 V**

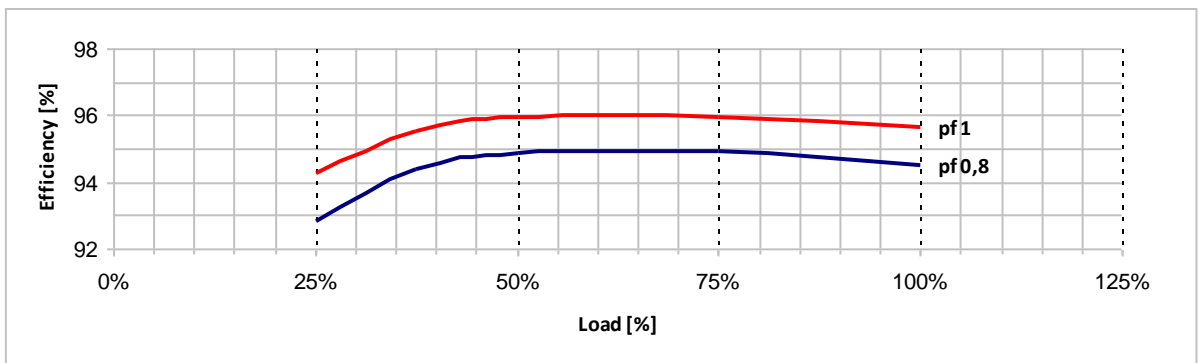



**460 V**

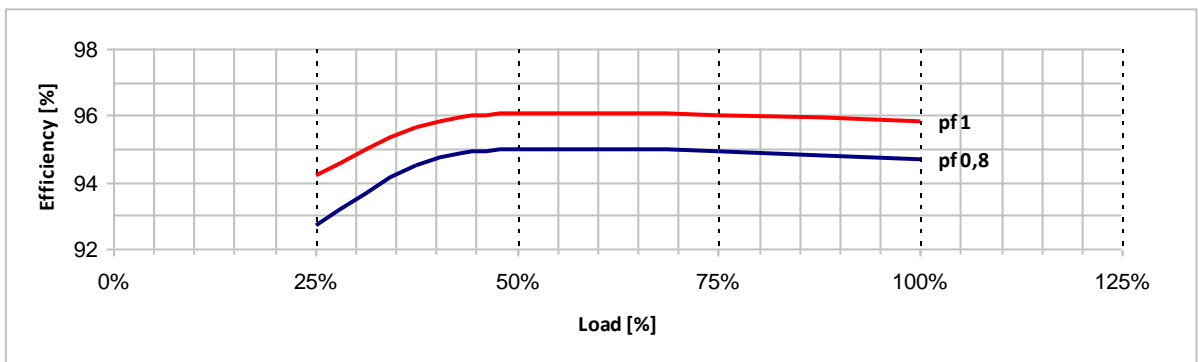

**480 V**

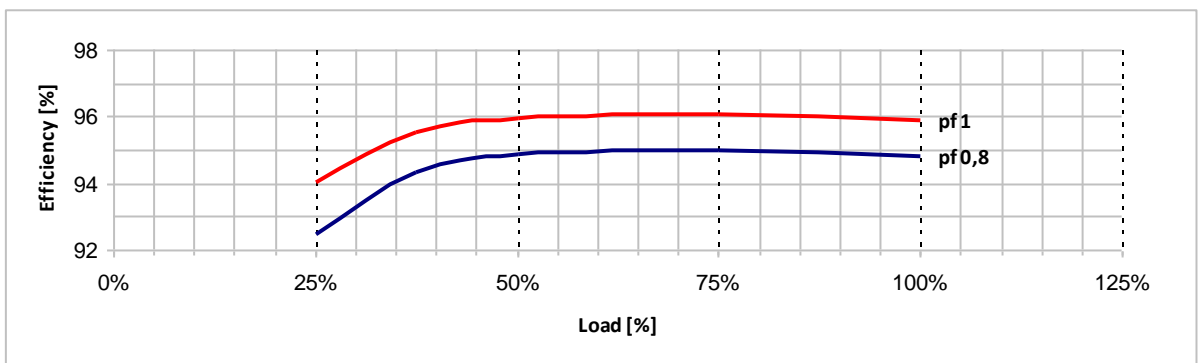

### Locked rotor motor starting curves (\*)

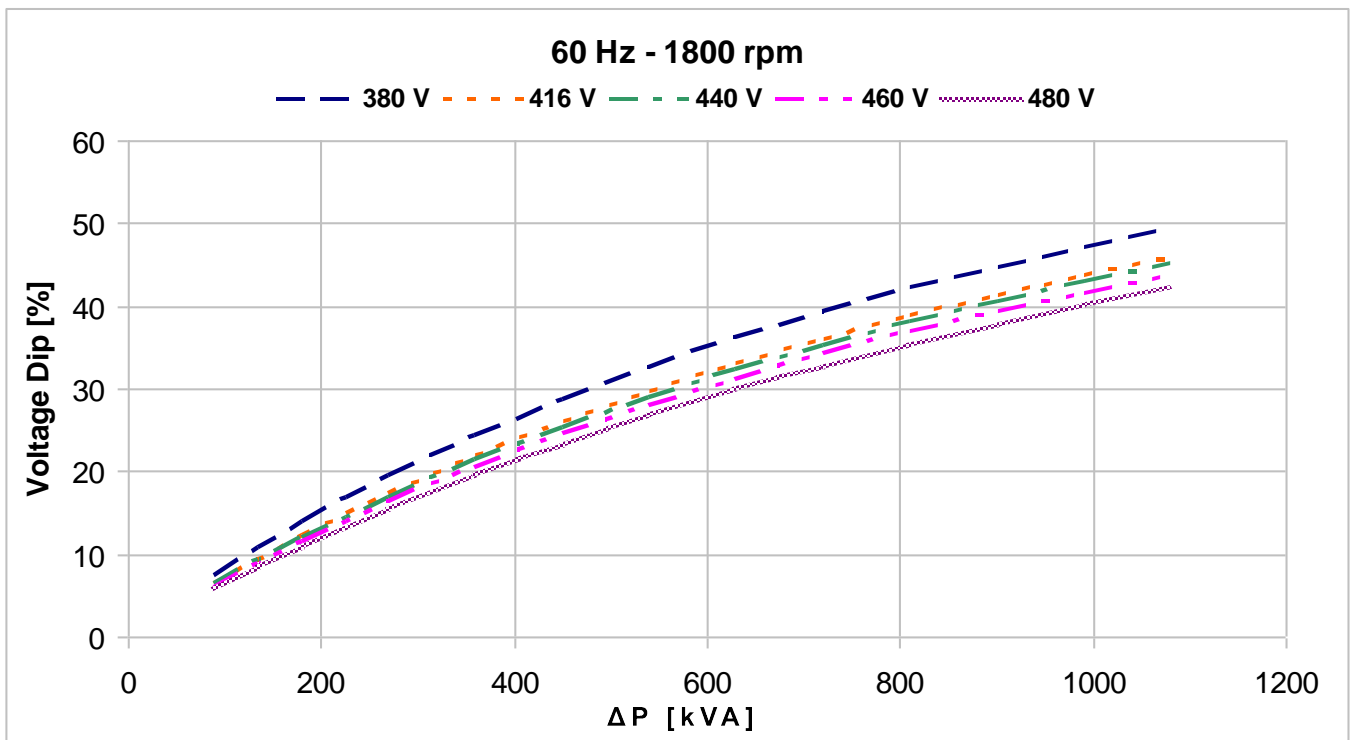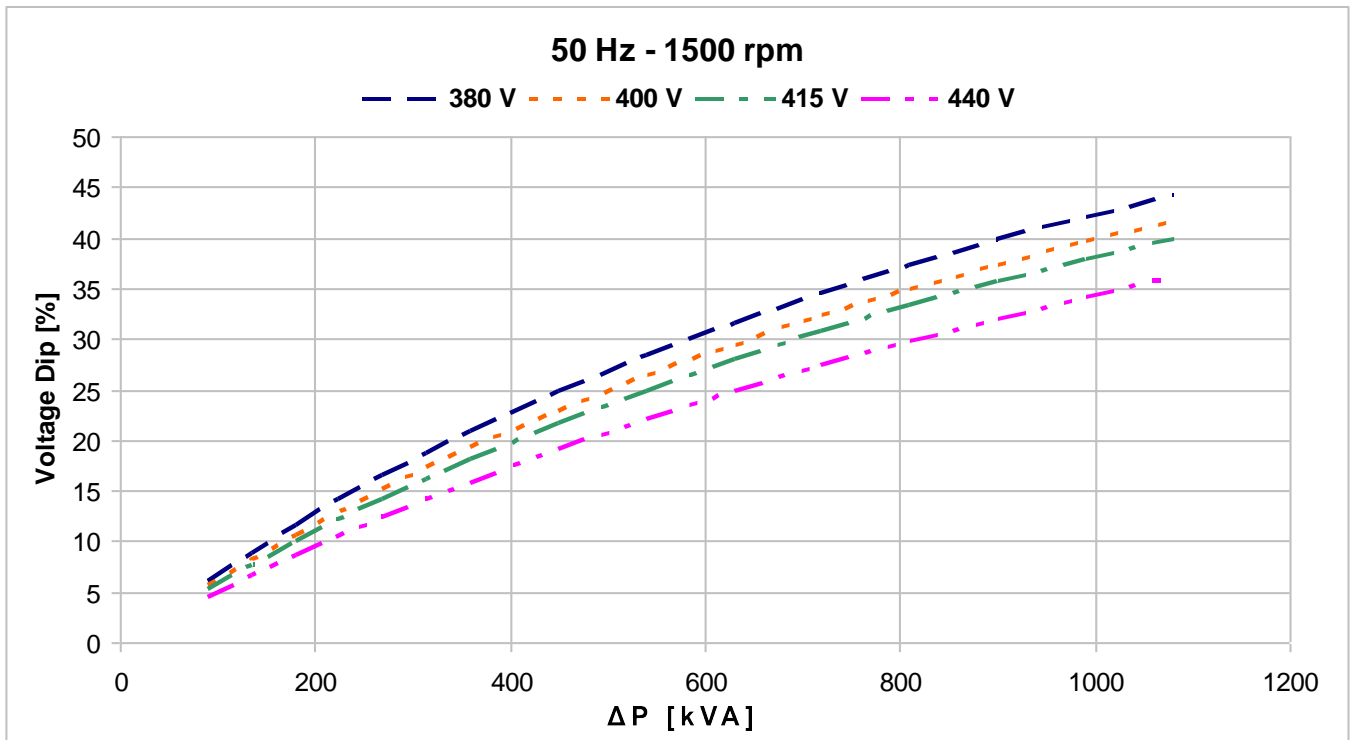

$$\Delta P = P_n \times \frac{I_s/I_n}{\cos \varphi_n \times \eta_n}$$

(\*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.